



PRODUCT INFORMATION

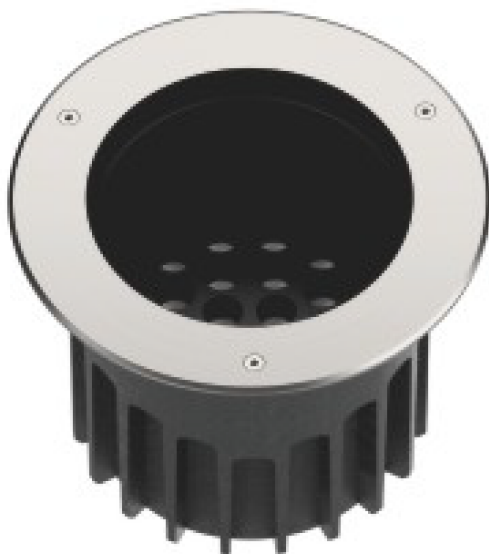

Application Type	Inground Lights
Colour Temperature	3500K, 6500k, 2700K, 3000K, 4000K, 6000K
Housing Type	Die Cast Aluminum, SS Ring
Dimmable	Yes
Controls	Analog, Dali, On/off
Wattage Upto	32W, 42W, 48w, 54W, 60W
Size	dia: 248mm, height: 225mm
Driver	Inbuilt, Remote



MODEL NO.	POWER	LIGHT SOURCE	LED COLOR	BEAM ANGLE	INPUT VOLT	CONTROL
ET-DIL2481842	42W	18PCS CREE SMD	2200-6500K RGBW1/A	5°/8°/10°/12°/20°/25°/30°/40°/45°/60°/100°/120°/150°/180°	AC110-120V /AC110-240V	ON/OFF /T19a0-10V/DALI
ET-DIL2481832	32W/42W	18PCS CREE SMD	2200-6500K RGBW1/A	5°/8°/10°/12°/20°/25°/30°/40°/45°/60°/100°/120°/150°/180°	AC220-240V	ON/OFF /T19a0-10V/DALI
ET-DIL2481854A	42-54W	18PCS CREE SMD	2200-6500K RGBW1/A	5°/8°/10°/12°/20°/25°/30°/40°/45°/60°/100°/120°/150°/180°	DC24V/DC36V /DC48V	ON/OFF /PWM/T19a0-10V/DALI/DMX512
ET-DIL2481854B	42-54W	18PCS CREE SMD	2200-6500K RGBW1/A	5°/8°/10°/12°/20°/25°/30°/40°/45°/60°/100°/120°/150°/180°	DC24V	PWM/DALI/DMX512
ET-DIL2481854C	42-54W	18PCS CREE SMD	2200-6500K RGBW1/A	5°/8°/10°/12°/20°/25°/30°/40°/45°/60°/100°/120°/150°/180°	DC24V	PWM/DMX512
ET-DIL2481860C	42-60W	18PCS CREE SMD	2200-6500K RGBW1/A	5°/8°/10°/12°/20°/25°/30°/40°/45°/60°/100°/120°/150°/180°	DC24V /AC110-240V	PWM/DMX512 /DMX-RDM